

## **Replacing gasket (under) Catalytic Combustor Model 205** **Fireview**

Please read all all of the instructions before you begin the procedure.  
Confirm that you have all of the necessary tools and material. If you have any questions technical support is available at 1-800-866-4344, Monday – Saturday 9:00 – 5:00, E.T.

### **Tools Needed:**

- ½” socket or wrench
- Putty knife
- Wire brush
- Scissors


### **Materials Needed:**

- 3 ft. .250 gasket
- Gasket glue

1. Make sure the stove is cool.
2. Remove the top lid from the stove. The top lid is not fastened to the stove and will lift straight up and off.




3. Remove the catalytic combustor from the stove. If you have not already done so remove the transport bolts with a ½” socket or wrench. The bolts do not need to be returned to the stove. Lift the combustor out of the stove.

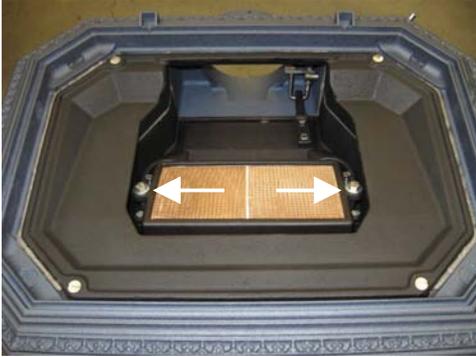

4. Remove the gasket from around the combustor opening in the combustor pan. Use a putty knife and wire brush to remove any residual gasket or glue. Vacuum up any loose debris.



5. Dry fit the replacement gasket. Start in a corner and lay the gasket into the channel until you are back to the starting point. Cut off excess gasket if necessary with sharp scissors. Set gasket aside.

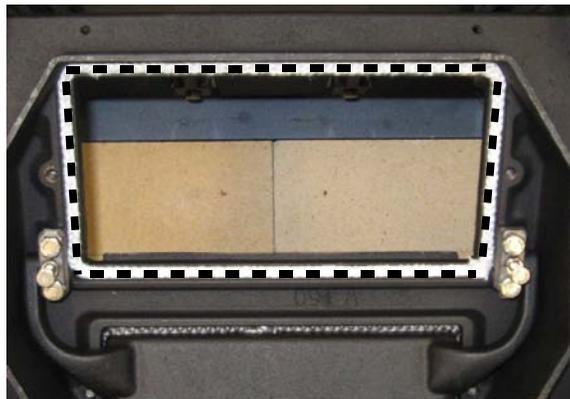

6. Apply a small bead of gasket glue into the gasket channel.
7. Install replacement gasket as in step 5. Lightly press (don't stretch) the gasket into the glue and channel. Let gasket stand for 10 minutes.



8. Return the catalytic combustor to the stove. The open side of the hooks for the transport bolts should face the flue exit of the stove. (Do not reinstall the shipping bolts.)



9. Carefully replace the top lid and confirm it is properly seated.
10. Enjoy your stove!

**We need your help!** Woodstock Soapstone Co. takes pride in providing the highest quality products as well as the best customer service in our industry. We welcome your suggestions and input to help us achieve these goals. If you have any comments to improve our products, service, and information provided in these instructions please contact us at (800) 866-4344 or [info@woodstove.com](mailto:info@woodstove.com). Thank you.

2/12/10